


T&G CONNECT

Installs Fast


Continuous Insulation
with Built-In Furring

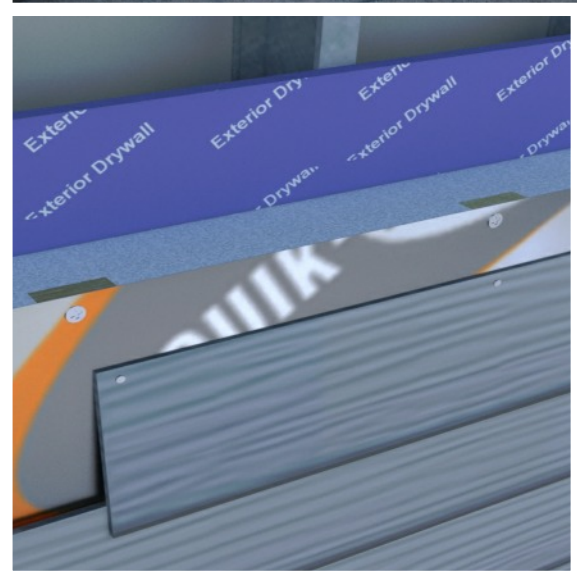

QUIK-THERM™ Inspired by Building Science

Quik-Therm (QT) Connect is a cost and time saving alternative to conventional rigid insulation products and strapping methods. QT Connect consists of a closed cell expanded polystyrene (EPS core) with inherent 3/4" thick x 3" wide plywood nailing strips imbedded into the foam insulation panel and hermetically sealed in place with metalized polymer films. In one simple and cost effective solution, Connect structurally attaches high performance continuous insulation and heavy claddings to concrete, brick, block and framed walls, floors, roofs and ceilings. QT Connect can be installed vertical or horizontal.

- Rugged, durable and lightweight. Fast and easy to install
- Nailing strips spaced 16" or 24" OC
- Cut furring and insulation in one operation
- Tongue & groove connections. Easy alignment and superior panel support and precision
- Lean construction technology. Code complaint air and vapour barrier. No poly, batt insulation or building wrap required
- Achieves code compliance as part of an air, vapor and/or radon barrier system when joints and penetrations are taped
- 4' X 8' Sheets. Thicknesses: 2" to 6". Perforated or non-perforated

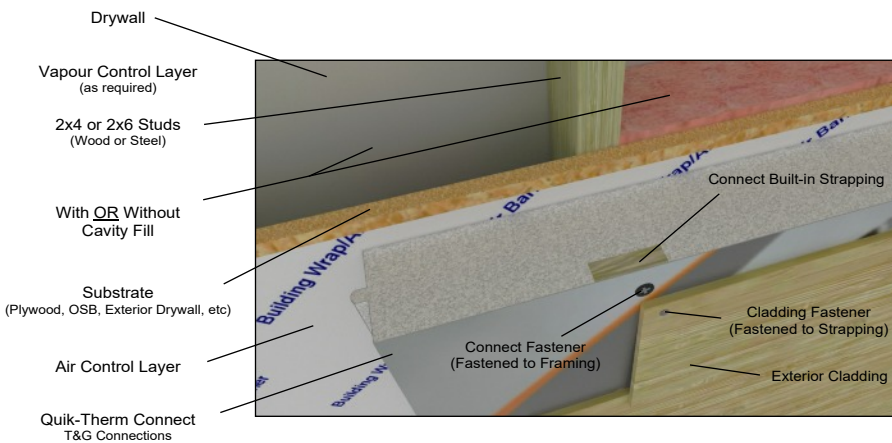

Morrison Hershfield

"The use of effective R-values when evaluating the thermal resistance of an assembly is preferable to using the nominal R-value of the insulation alone. The benefits of this approach have been demonstrated in results obtained through laboratory tests such as ASTM C1363 and by data published in ASHRAE 90.1. Quik-Therm Insulation Solutions Inc. has undertaken a program of full scale thermal performance testing to ASTM C1363-05 Standard Test Method for Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus."

- Mark Lawton - Senior Building Scientist


Quik-Therm Effective Thermal Resistance

Quik-Therm Thickness	2x4 Wood Frame with R-12 Batt	2x6 Wood Frame with R-20 Batt	Wood Frame Empty Cavity	2x6 Steel Frame with R-20 Batt	Interior Masonry	Exterior Masonry
1.5"	21	26	11	17	11	8
2"	23	28	13	19	13	10
3"	28	32	17	23	18	15
4"	32	36	21	27	22	19
5"	36	40	25	31	26	23
6"	40	44	29	35	30	27

Nominal R-Value Testing ASTM C-518 = R-4.18 | Steel Framing ASHRAE Table A3.13

ASTM C1363 Test Results

Description of Test Samples Starting from Exterior	Overall Thermal Resistance (hr·ft ² ·F/Btu), R-value (R _u)
Cement board cladding, 2" Quik-Therm Connect, 7/16" OSB, 2x4 wood studs, empty cavity, 1/2" drywall	13.2
3" Quik-Therm Connect, 3/8" drainage gap, 7/16" OSB, 2x4 wood studs, empty cavity, 3/8" drywall	17
3.5" Quik-Therm, 7/16" OSB, 2x4 wood studs, empty cavity, 1/2" drywall	19.5
Concrete Wall, 6" Quik-Therm, steel framing, empty cavity, 1/2" drywall	29.9
2" Quik-Therm, 7/16" OSB, 2x4 wood studs, R-13 fiberglass batts, 3/8" drywall	23.1
2" Quik-Therm, 7/16" OSB, 2x6 wood studs, R-20 fiberglass batts, 1/2" drywall	28.3
Wood cladding, 3/8" rain screen, 3" Quik-Therm, 2x4 wood studs, R-12 fiberglass batts, 1/2" drywall	29.96

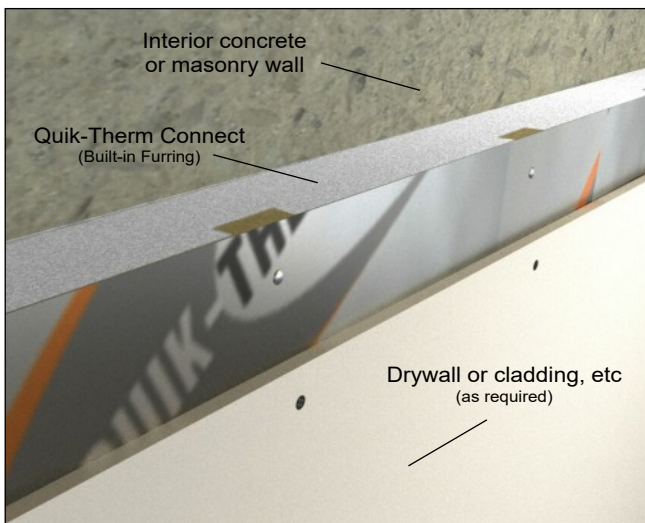

Tested By Canadian Accredited Laboratories. Supported By Building Science

Property	Nominal Value	Test Method
Dimensional Stability	1.5	ASTM D2126
Maximum Linear Change, %		
Length Tolerance, mm (in)	±3.2 (±0.125)	—
Width Tolerance, mm (in)	±1.6 (±.063)	—
Nominal R-Value	Type 1	Type 2
	3.81	4.18
Nominal Density, pcf (kg/m ³)	1.0 (16)	1.4 (23)
Compressive Strength, psi (kPa)	12.6 (87)	19.7 (136)
Water Vapour Transmission, perms	<1.0	ASTM E96
Air Permeance (L/s·m ²)	0.0139	ASTM E2178-13
Effective R-Value Testing	See Table Above	ASTM C1363
Limiting Oxygen Index	26 %	ASTM D2863-97
Flame Spread	250	CAN/ULC - S102.2
Smoke Developed	410	CAN/ULC - S102.2

Quik-Therm Insulation Solutions Inc.
 (888) 735-3012 (204) 736-3012

6" Quik-Therm and fiber cement board siding meets the requirements of CAN/ ULC-S101 as required by Article 3.2.3.8. Test Report: T1035-4 QAI Laboratories.