




Connect Air Dry

Patent Pending

Key Product Details

Quik-Therm Insulation Solutions Inc.

Quik-Therm Air Dry Connect (Air Dry) is manufactured using Type 2 closed-cell expanded polystyrene (EPS) with advanced perforated metallic polymer facers. Located on the inboard side of Air Dry are unobstructed, free air drainage cavities that occupy approximately 75% of the inboard surface. Located 16" or 24" OC., plywood furring strips/battens are embedded within the insulation panels. Battens are hermetically sealed in place by the perforated metallized polymer facers.

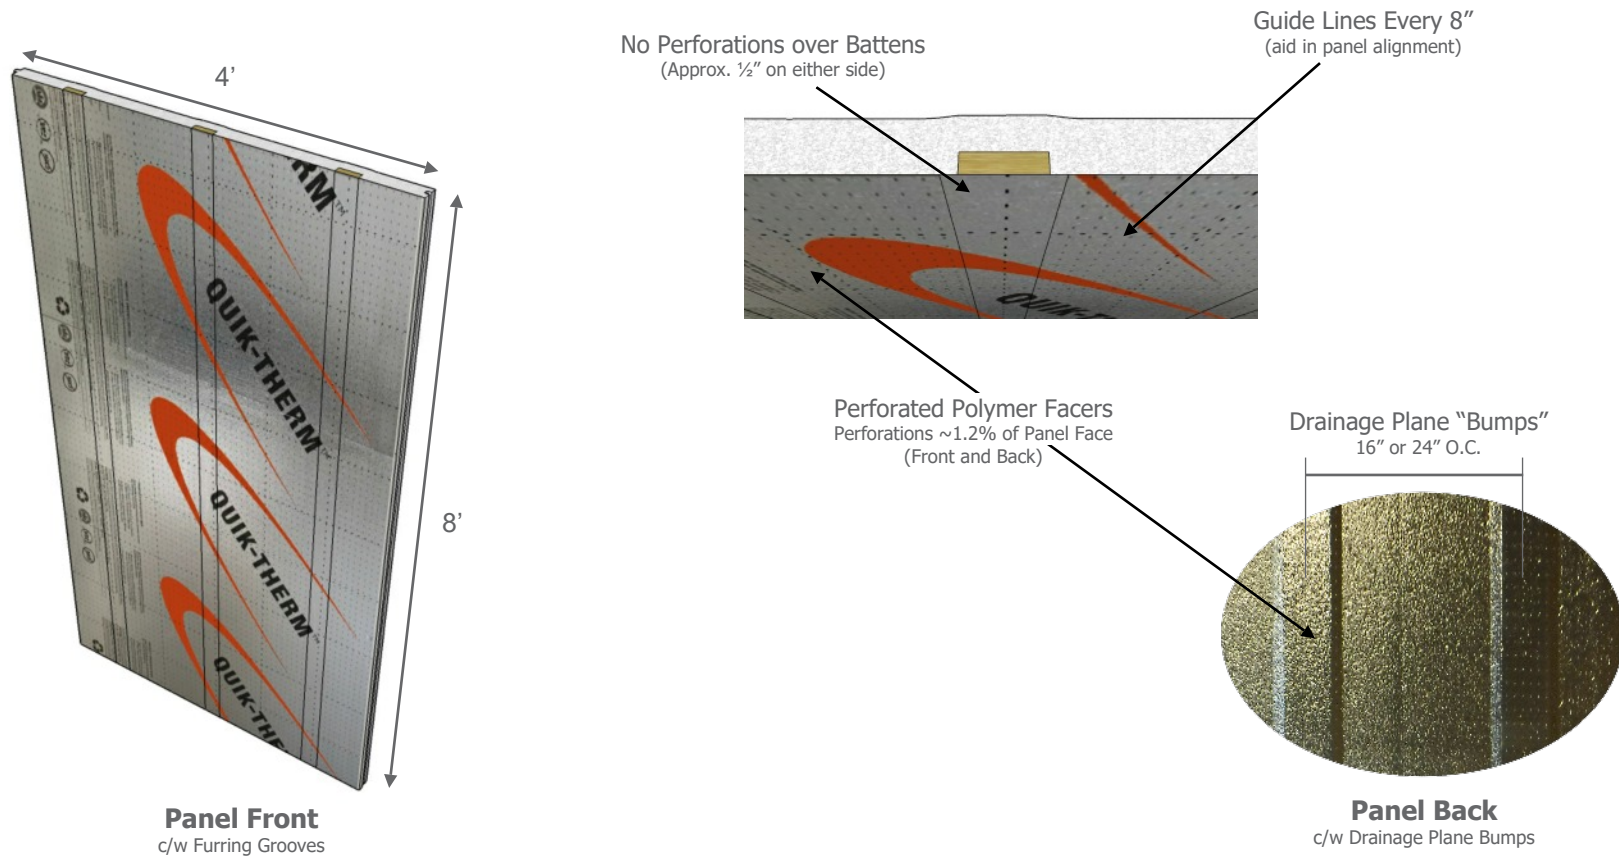

Panel Front
c/w Furring Grooves

Panel Back
c/w Drainage Plane Bumps